



DOUBLE SPAN STRAIN POLE SELECTION CHART FOR $100^\circ \leq \theta < 110^\circ$

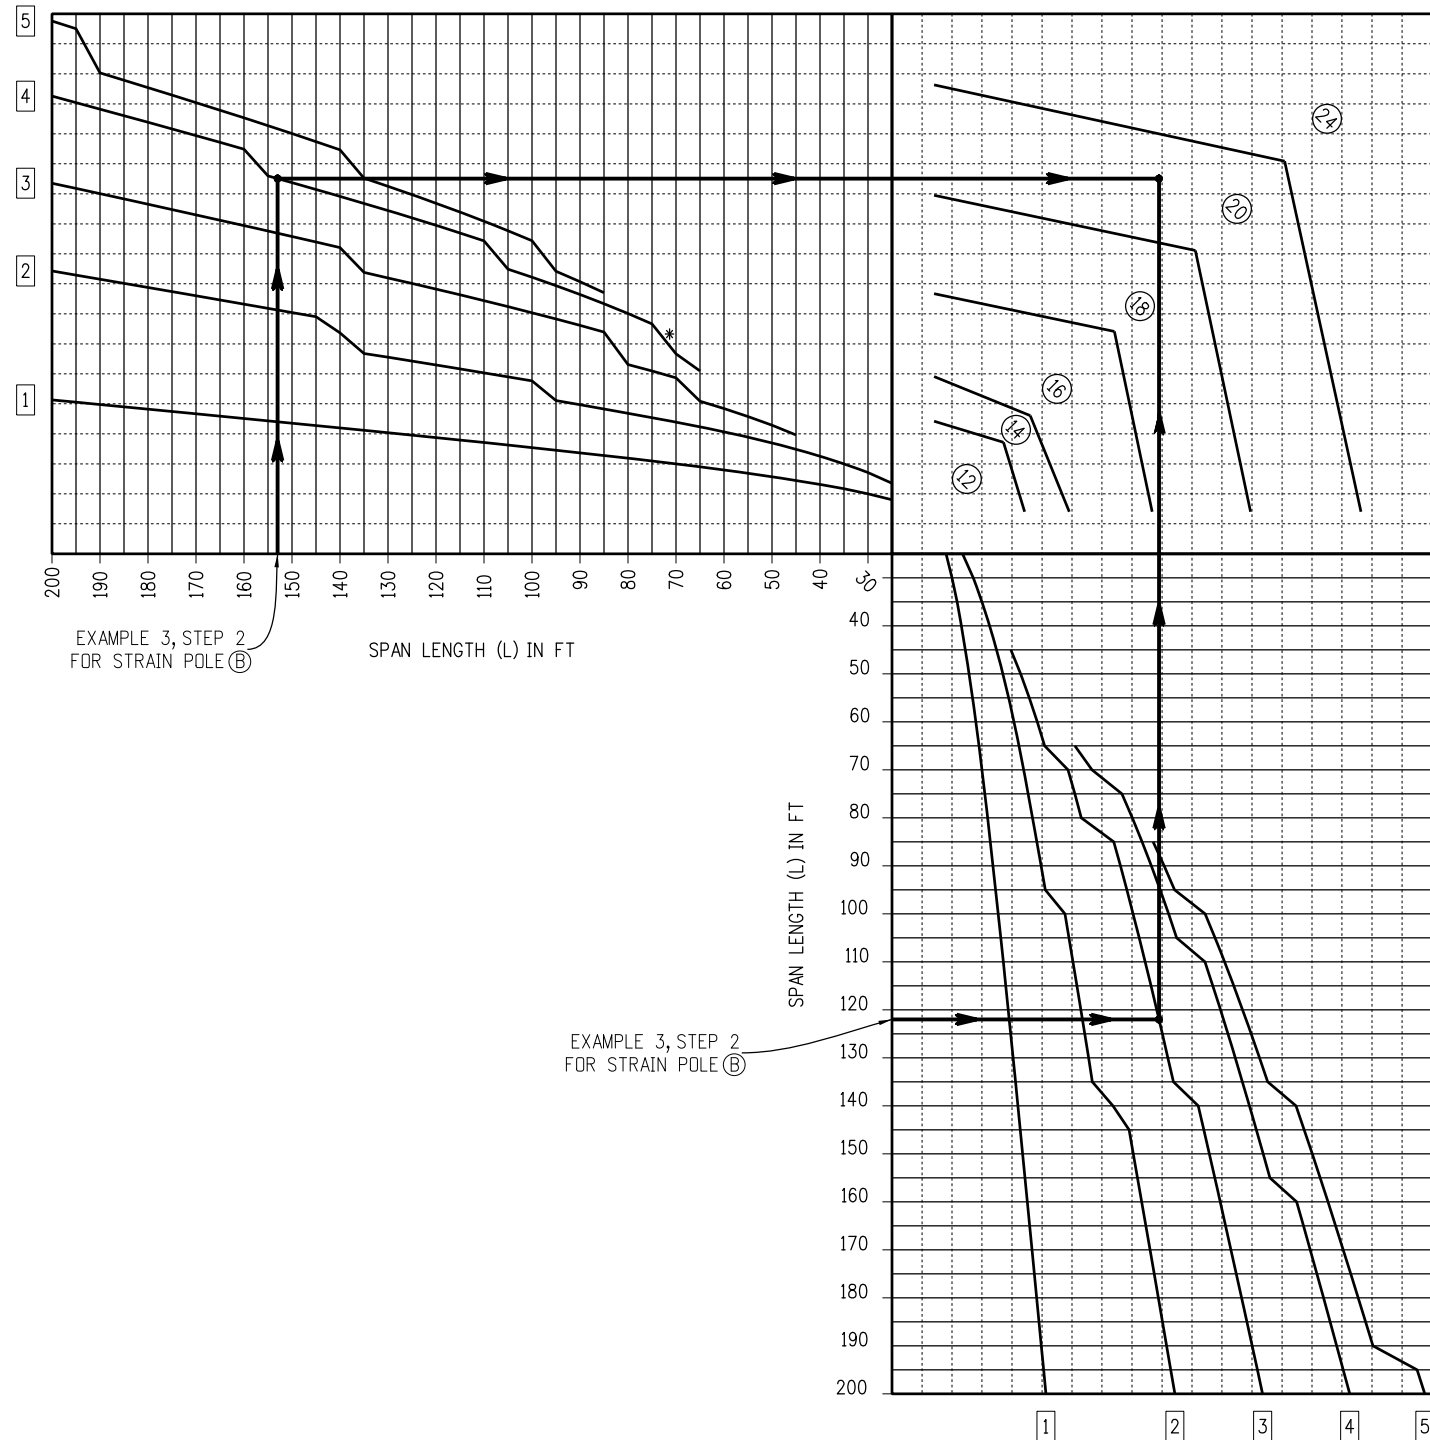

DOUBLE SPAN STRAIN POLE SELECTION CHART FOR $110^\circ \leq \theta < 120^\circ$

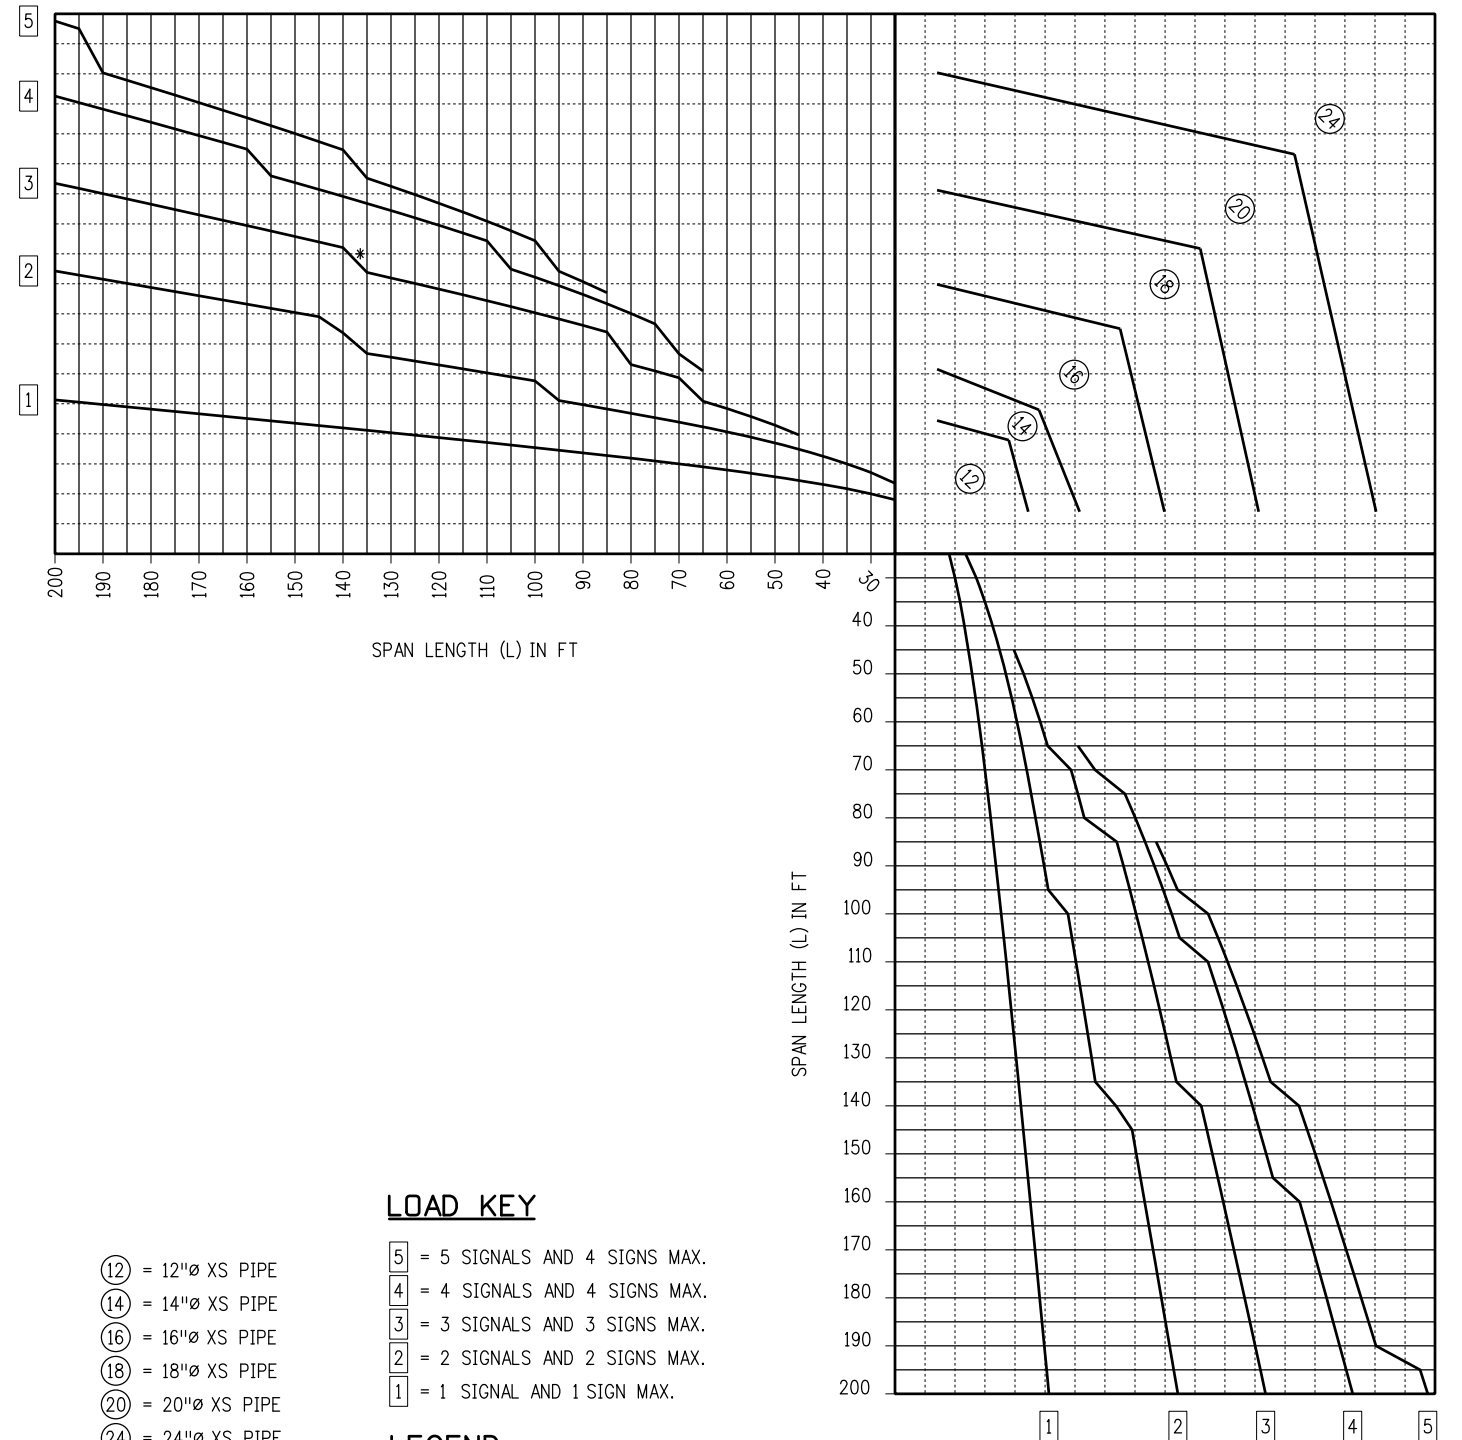

LOAD KEY

- 5 = 5 SIGNALS AND 4 SIGNS MAX.
- 4 = 4 SIGNALS AND 4 SIGNS MAX.
- 3 = 3 SIGNALS AND 3 SIGNS MAX.
- 2 = 2 SIGNALS AND 2 SIGNS MAX.
- 1 = 1 SIGNAL AND 1 SIGN MAX.

LEGEND

* = TYPICAL JUMP CAUSED BY CHANGE IN POLE SIZE USING SPAN LENGTH INCREASEMENT OF 5'.

- (12) = 12" XS PIPE
- (14) = 14" XS PIPE
- (16) = 16" XS PIPE
- (18) = 18" XS PIPE
- (20) = 20" XS PIPE
- (24) = 24" XS PIPE

Computer File Information

Creation Date: 07-01-11 Initials: LEC
 Last Modification Date: 07-28-14 Initials: HHB
 Full Path: www.dot.state.co.us/DesignSupport/
 Drawing File Name: S-614-41 (7-11 of 13).dgn
 CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English



Sheet Revisions

Date:	Comments

Colorado Department of Transportation



4201 East Arkansas Avenue
 Denver, Colorado 80222
 Phone: (303) 757-9543
 Fax: (303) 757-9219

Safety & Traffic Engineering Branch KCM/RLD

TEMPORARY SPAN WIRE SIGNALS

Issued By: Safety & Traffic Engineering Branch July 4, 2012

STANDARD PLAN NO.

S-614-41

Sheet No. 10 of 13