



-DOUBLE SPAN SPAN-WIRE DIAMETER SELECTION CHARTS (2 OF 2)-


DOUBLE SPAN SPAN-WIRE DIAMETER SELECTION CHART FOR 20" Ø XS POLE

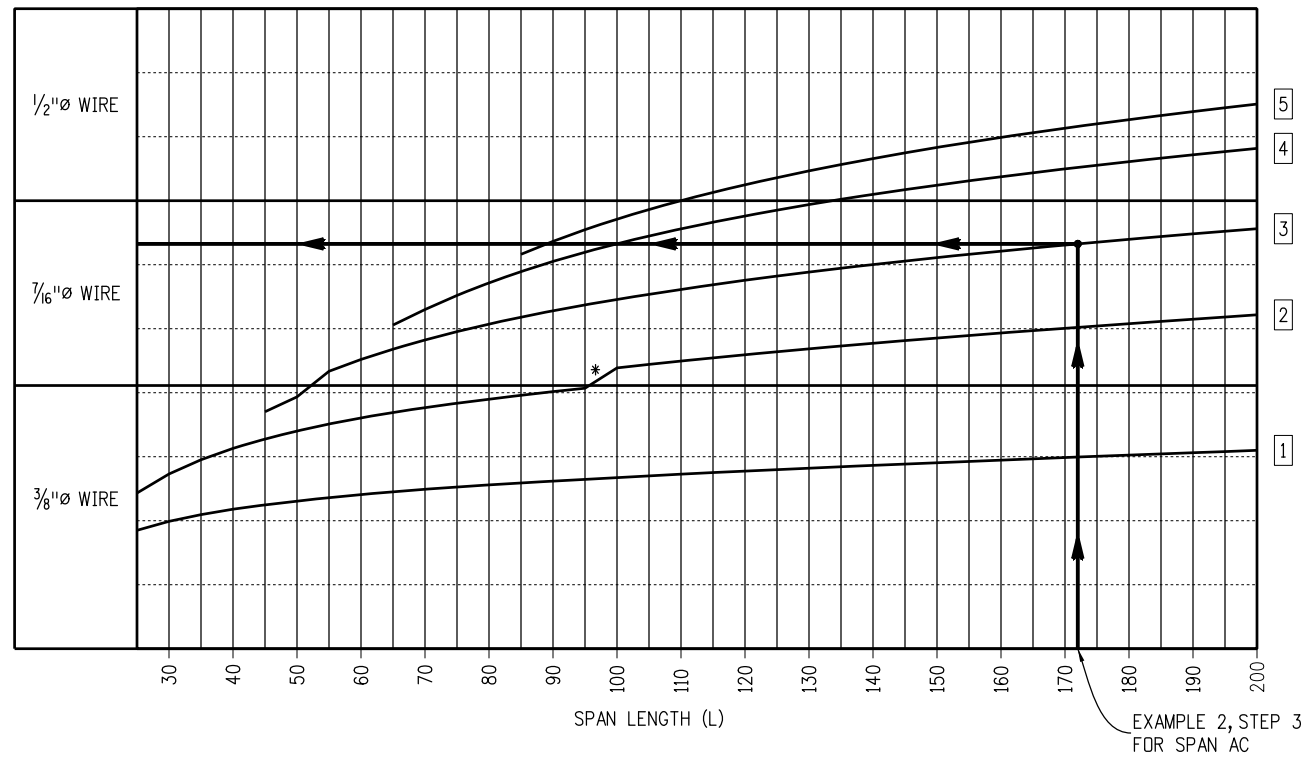

DOUBLE SPAN SPAN-WIRE DIAMETER SELECTION CHART FOR 24" Ø XS POLE

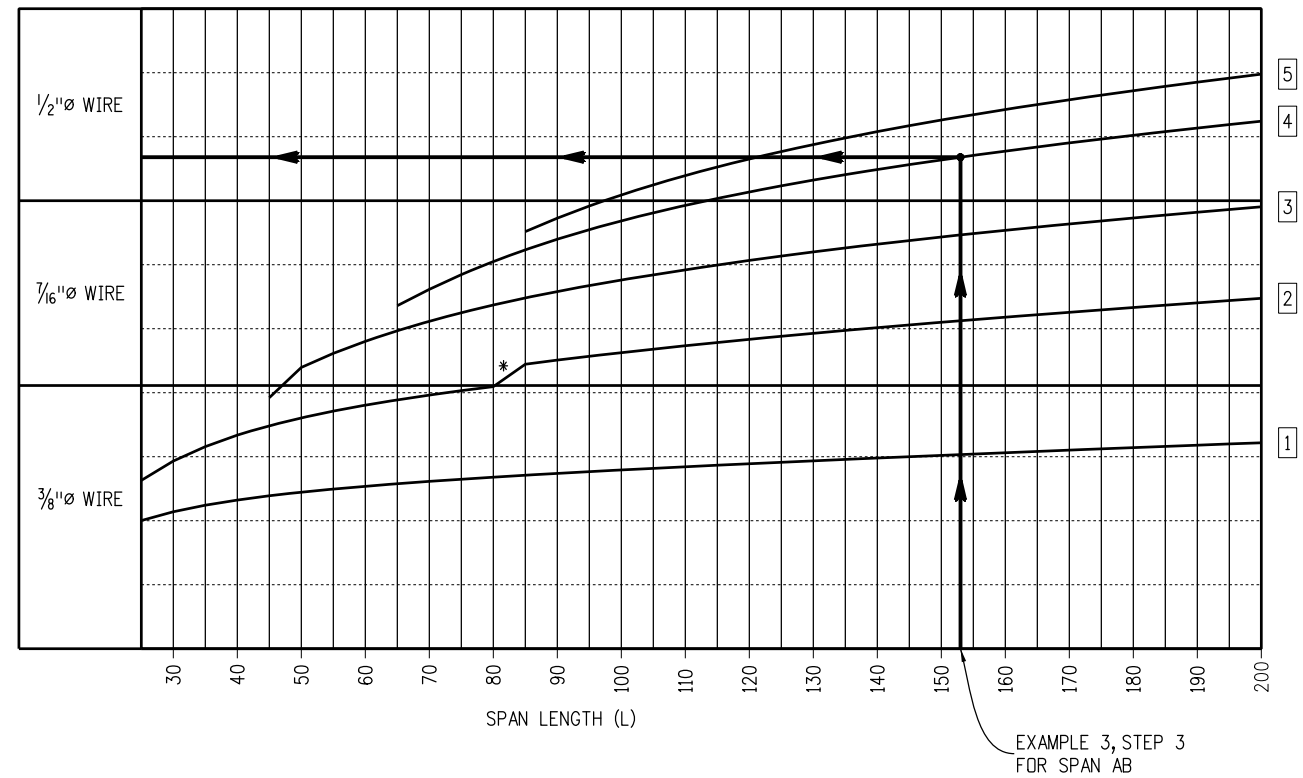

DOUBLE SPAN SPAN-WIRE DIAMETER SELECTION CHART FOR 24" Ø SCH 40 POLE

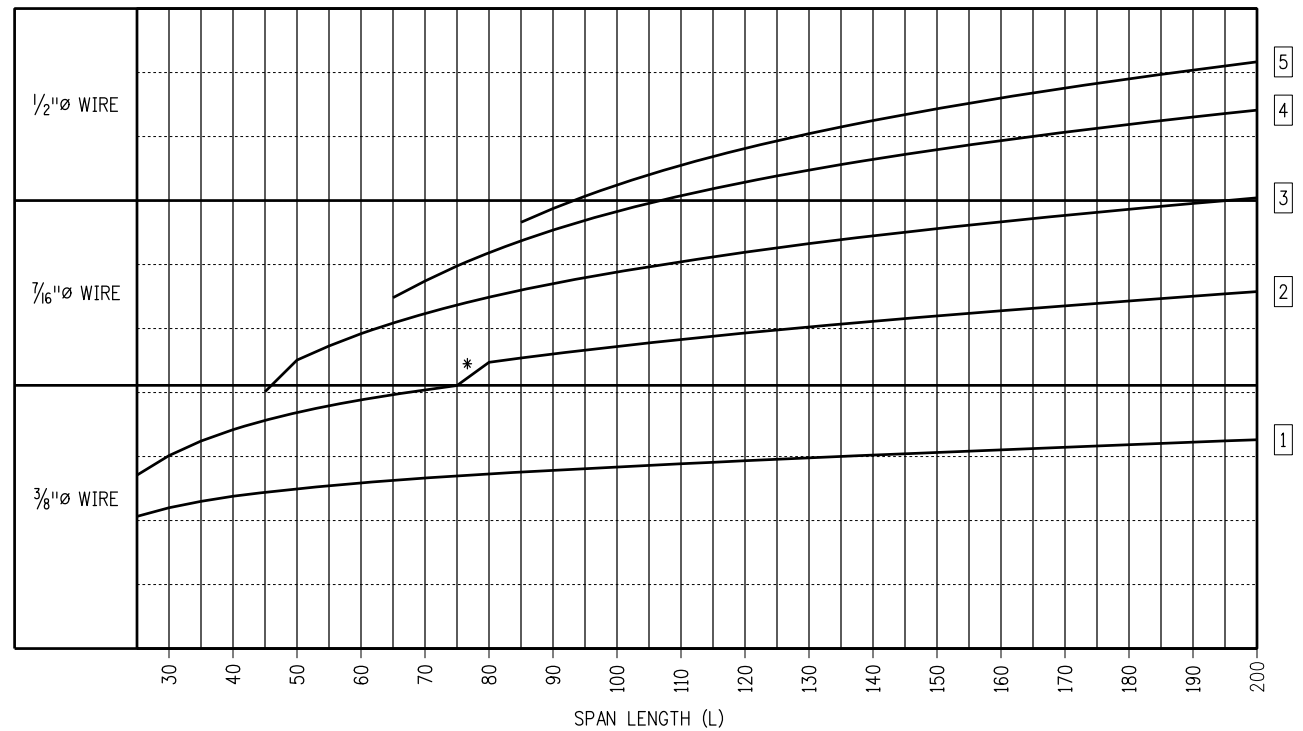

LOAD KEY

- 5 = 5 SIGNALS AND 4 SIGNS MAX.
- 4 = 4 SIGNALS AND 4 SIGNS MAX.
- 3 = 3 SIGNALS AND 3 SIGNS MAX.
- 2 = 2 SIGNALS AND 2 SIGNS MAX.
- 1 = 1 SIGNAL AND 1 SIGN MAX.

LEGEND

* = TYPICAL JUMP CAUSED BY CHANGE IN POLE SIZE USING SPAN LENGTH INCREASEMENT OF 5'.

Computer File Information

Creation Date: 07-01-11 Initials: LEC
 Last Modification Date: 07-28-14 Initials: HHB
 Full Path: www.dot.state.co.us/DesignSupport/
 Drawing File Name: S-614-41 (12-13 of 13).dgn
 CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English



Sheet Revisions

Date:	Comments

Colorado Department of Transportation



4201 East Arkansas Avenue
 Denver, Colorado 80222
 Phone: (303) 757-9543
 Fax: (303) 757-9219

Safety & Traffic Engineering Branch

KCM/RLD

**TEMPORARY SPAN WIRE
 SIGNALS**

Issued By: Safety & Traffic Engineering Branch July 4, 2012

STANDARD PLAN NO.

S-614-41

Sheet No. 13 of 13