



LANE DROP

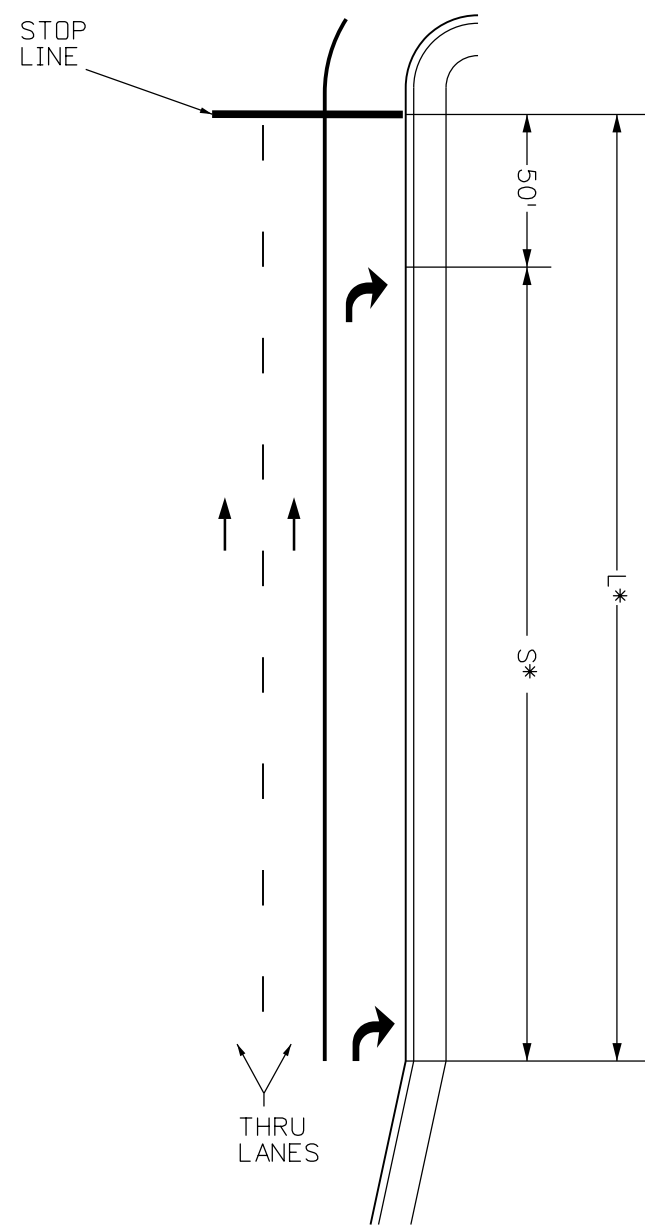

POCKET LANE

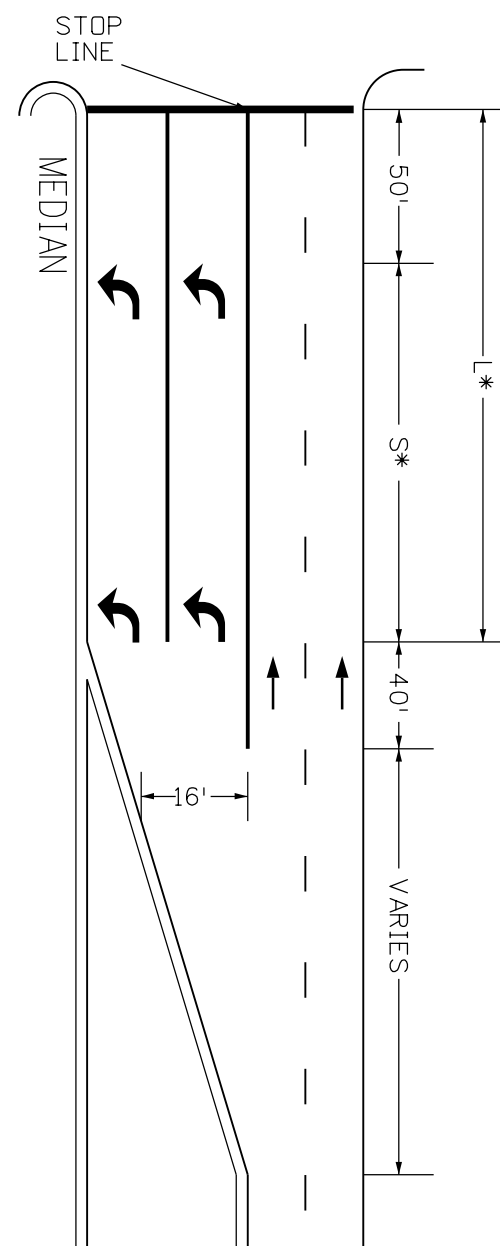

DOUBLE TURNING

GENERAL NOTES

1. THE SPACING, IN THE TABLE APPLIES TO LEFT & RIGHT TURN LANES.
2. WHEN ONE (1) ARROW IS USED, IT SHALL BE PLACED AT THE BEGINNING OF THE FULL WIDTH TURN LANE, OTHERWISE USE THE TABLE BELOW FOR ARROW PLACEMENT.

LENGTH (L)	NO. OF ARROWS PER LANE	SPACING (S)
L < 200'	1	NA
200' - 350'	2	EVENLY SPACED BETWEEN 150'-300'
350' - 650'	3	
650' - 950'	4	
950' ≤	≥5	

*L (LENGTH) AND *S (SPACING) PROVIDED IN THE TABLE ABOVE WILL HELP DETERMINE THE NUMBER OF ARROWS NEEDED PER LANE.

LEGEND

→ Direction of Travel

ARROW PLACEMENTS AT INTERSECTIONS

Computer File Information		Sheet Revisions		 Colorado Department of Transportation 4201 East Arkansas Avenue Denver, Colorado 80222 Phone: 303-757-9543 FAX: 303-757-9219 Safety & Traffic Engineering KCM	PAVEMENT MARKINGS Issued By: Safety & Traffic Engineering Branch July 4, 2012	STANDARD PLAN NO.	
Creation Date: 02/08/17	Initials: MBhat	Date:	Comments:			S-627-1	
Last Modification Date:	Initials:					Sheet No. 5 of 8	
Full Path: www.coloradodot.info/library/traffic/traffic-s-standard-plans							
Drawing File Name: S-627-01.dgn							
CAD Ver.: MicroStation V8i Scale: Not to Scale Units: English							