



gibberta 9:55:59 AM C:\Projects\21254\Drawings\21254DES_ADA.dgn

Approximate Station	Side	Site	Dimensions	Detectable Warning Type	202-00206		202-00226		608-00015		Info / Remarks
					Removal of Concrete Curb Ramp		Removal of Asphalt Mat (Special)		Detectable Warnings		
					AREA (SY)	As Built	Area (SY)	As Built	SF	As Built	
Divide Intersection											
939+50		A	24" x 48"	Cast Iron Plate	0.89				8.00		
939+50		B	24" x 48"	Cast Iron Plate	0.89				8.00		
Woodland Park Trail											
1007+13.86	RT	G	24" x 60"	Cast Iron Plate			1.11		10.00		Red Feather Lane
1007+60.89	RT	H	24" x 60"	Cast Iron Plate			1.11		5.00		Red Feather Lane
1021+37.60	RT	I	24" x 60"	Cast Iron Plate			1.11		5.00		West Kelly Rd
1021+87.07	RT	J	24" x 120"	Cast Iron Plate			2.22		10.00		West Kelly Rd
1038+46.51	RT	K	24" x 60"	Cast Iron Plate			1.11		5.00		Valley View Drive
1039+04.71	RT	L	24" x 60"	Cast Iron Plate			1.11		5.00		Valley View Drive
1045+55.84	RT	M	24" x 60"	Cast Iron Plate			1.11		5.00		Apache Trail
1045+91.10	RT	N	24" x 60"	Cast Iron Plate			1.11		5.00		Apache Trail
1050+45.46	RT	O	24" x 60"	Cast Iron Plate			1.11		5.00		Sunnywooc Lane
1050+77.15	RT	P	24" x 60"	Cast Iron Plate			1.11		5.00		Sunnywooc Lane
1055+04.64	RT	Q	24" x 60"	Cast Iron Plate			1.11		5.00		Lovell Gulch Road
1055+55.92	RT	R	24" x 60"	Cast Iron Plate			1.11		5.00		Lovell Gulch Road
1071+94.29	RT	S	24" x 60"	Cast Iron Plate			1.11		5.00		Regent Drive
1073+52.69	RT	T	24" x 60"	Cast Iron Plate			1.11		5.00		Regent Drive
1081+47.68	RT	U	24" x 60"	Cast Iron Plate			1.11		5.00		Fairfield Lane
1081+96.53	RT	V	24" x 60"	Cast Iron Plate			1.11		5.00		Fairfield Lane
1106+08.92	RT	W	24" x 60"	Cast Iron Plate			1.11		5.00		Impact Church
1106+66.87	RT	X	24" x 60"	Cast Iron Plate			1.11		5.00		Impact Church
1122+74.69	RT	Y	24" x 60"	Cast Iron Plate			1.11		5.00		Triple B Road
1123+37.51	RT	Z	24" x 60"	Cast Iron Plate			1.11		5.00		Triple B Road
1150+00.47	RT	AA	24" x 60"	Cast Iron Plate			1.11		5.00		Private Access
1150+67.37	RT	AB	24" x 60"	Cast Iron Plate			1.11		5.00		Private Access
1172+97.00	RT	AC	24" x 60"	Cast Iron Plate			1.11		5.00		Red Rock View
1173+65.18	RT	AD	24" x 60"	Cast Iron Plate			1.11		5.00		Red Rock View
1256+18.53	LT	AE	24" x 60"	Cast Iron Plate			1.11		5.00		South Meadows
1256+55.08	LT	AF	24" x 60"	Cast Iron Plate			1.11		5.00		South Meadows
1321+74.82	LT	AG	24" x 60"	Cast Iron Plate			1.11		5.00		Path joins roadway
1337+29.08	LT	AH	24" x 60"	Cast Iron Plate			1.11		5.00		Path joins roadway
1359+15.94	LT	AI	24" x 60"	Cast Iron Plate			1.11		5.00		Manitou Lake Picnic Area
1359+24.20	RT	AJ	24" x 60"	Cast Iron Plate			1.11		5.00		Manitou Lake Picnic Area
					1.80		35.00		176.00		

- Woodland Park Trail detectable warnings are located within the plan sheets for approximate locations
- Areas of concrete curb ramp removal and asphalt removal special shall be done in a neat line using a saw cut
- Areas of concrete curb ramp removal and asphalt removal special shall only large enough to place cast iron plates indicated
- Sawcutting of asphalt and concrete for detectable warnings shall be included in the cost of the work

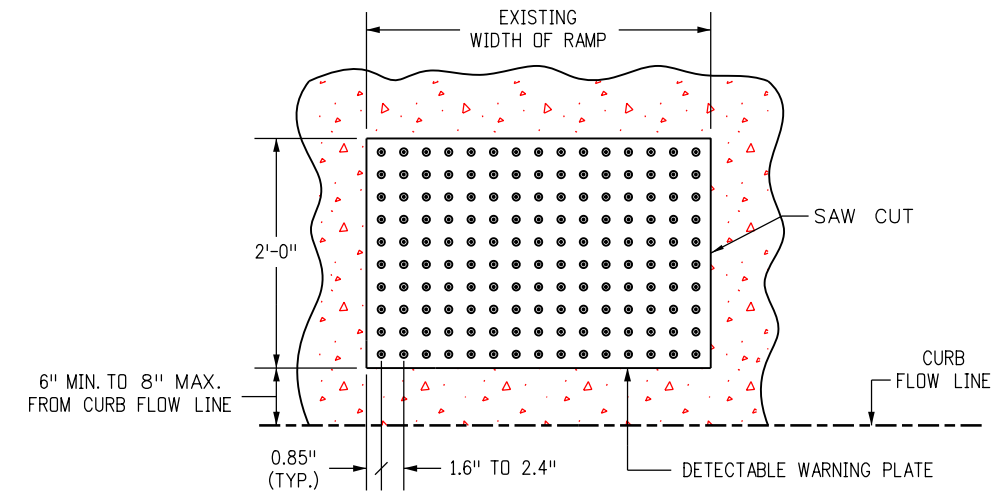

PLAN VIEW OF
DETECTABLE WARNING

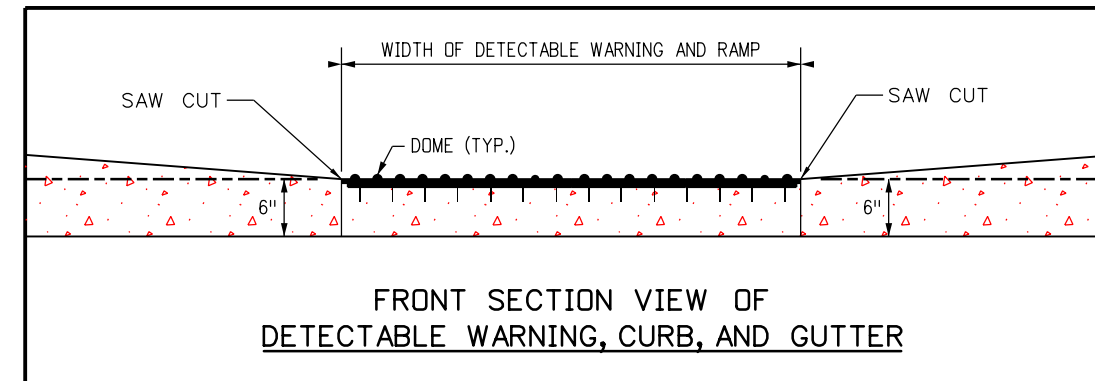

FRONT SECTION VIEW OF
DETECTABLE WARNING, CURB, AND GUTTER

Print Date: 2/27/2017			As Constructed No Revisions: Revised: Void:	TABULATION OF DETECTABLE WARNINGS Designer: AWG Detailer: Sheet Subset: ADA		Project No./Code STA 067A-039 21254 Sheet Number 22
File Name: 21254DES_ADA.dgn						
Unit Information						